

Large Tank Ultrasonic Monitoring System

Tank sizes 6,000 to 90,000 gallons (22,712 to 340,686 liters)



Monitors tank levels with industry leading accuracy
So you can optimize your inventory management



Externally Mounted, Install In Minutes

Xact ultrasonic systems mount externally on tanks, allowing for a quick, safe and easy setup. Customers avoid both costly expenses draining their tanks and safety hazards mixing fuel and electronics upon installation.

Critical Fill Level Alarms

Set thresholds to receive email updates when tanks reach critical low or high fill levels.

Other Key Takeaways

- Durable in harsh temperatures ranging from -40°C to 60°C
- Independent from any existing gauges or external power sources
- 3-5 year battery operation at 2 readings per day
- Integrates into MIS delivery scheduling programs
- For tank sizes ranging from 6,000 to 90,000 gallons (22,712 to 340,686 liters)

Precise Measurements Within $\pm 2\%$

Xact ultrasonic systems use sound waves to detect fill levels at an accuracy within $\pm 2\%$. These precise measurements help propane marketers get the most out of their inventory and monitor key customer accounts.

Satellite Communication

Xact ultrasonic systems transmit data via the Globalstar® satellite network to our website portal. This lets customers see fill levels online for tanks in areas without reliable cell coverage.





Precise measurements for inventory management

LARGE TANK SYSTEM SPECIFICATIONS

Battery

7.2 volt Lithium Thynol Chloride

Output power of Globalstar Satellite Radio

24dBm ±2 dB

Safety Rating

Class 1 Division 2 Group D

Class 1 Zone 2 Group IIA

Strap


Nylon – 40 feet (12 meters)

Dimensions

7.56in L x 5.07in W x 2.67in H
(192mm L x 129mm W x 68mm H)



Dimensions

4.92in L x 3.15in W x 2.87in H
(125mm L x 80mm W x 73mm H)

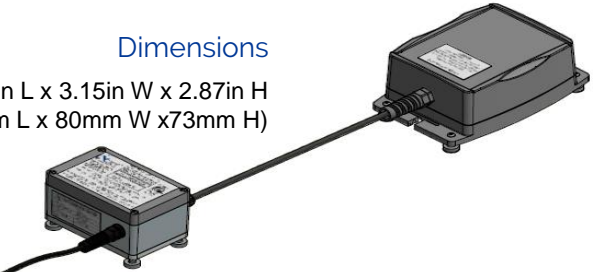

Dimensions

4.01in L x 4.01in W x 1.34in H
(102mm L x 102mm W x 34mm H)

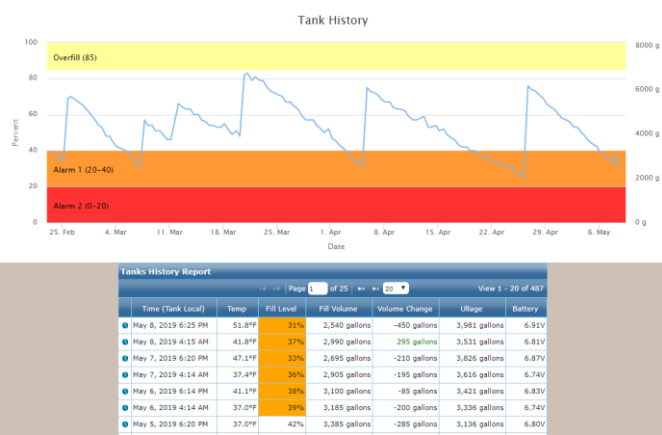

The liquid measurement data, along with the geometry of the tank, are used to calculate the precise fill level (± 2%) of the liquid in the tank, which is displayed on the Xact website. The tank fill level can also be integrated into your back office software, so that you can view all of your data in one place. Other benefits include email alerts of critical tank fill levels, GPS coordinates used for tank location with mapping capabilities and exportation of measurement data. Minimum tank fill level measurement is 10%.

SAFETY LABEL

Xact[®]
TANK MONITORING SYSTEMS
Schmitt Industries, Inc.
2765 NW Nicolai St.
Portland, OR USA
Phone: 503-227-7908
www.xact-data.com

Model: XACT-01/02 series
Manf. Date:

Class I, Division 2 Group D
Class I, Zone 2 Group IIA

Ex nA nC IIA T6 Gc
Tamb: -20°C to +55°C

WARNING – EXPLOSION HAZARD – BATTERY MUST ONLY BE CHANGED IN AN AREA KNOWN TO BE NON-HAZARDOUS.
AVERTISSEMENT – RISQUE D'EXPLOSION – AFIN D'EVITER TOUT RISQUE D'EXPLOSION, S'ASSURER QUE L'EMPLACEMENT EST DESIGNÉ NON DANGEREUX AVANT DE CHANGER LA BATTERIE

SISTEMA DE MONITOREO PARA TANQUES
Marca: XACT
7.2 V (con Baterias)

Gauge Reader Devices - Voc = 7.2VDC, Isc = 0.6A, La = 10.14µH, Ca = 701.26 µF
Use only replaceable battery pack XEC-722-003

ETL CLASSIFIED
ETL
Intertek
4000718
NOM-ETL
Intertek

For more information, visit xact-data.com



Schmitt Industries, Inc.
Corporate Offices
2765 NW Nicolai Street
Portland, Oregon 97210-1818 USA
Tel: +1 503.227.7908
Fax: +1 503.223.1258
www.schmitt-ind.com