


Ultrasonic Tank Level Monitoring System

Tank sizes 250 to 3,500 gallons (1,300 to 13,250 liters)



Monitor tank levels with industry leading accuracy, so you can optimize your inventory management

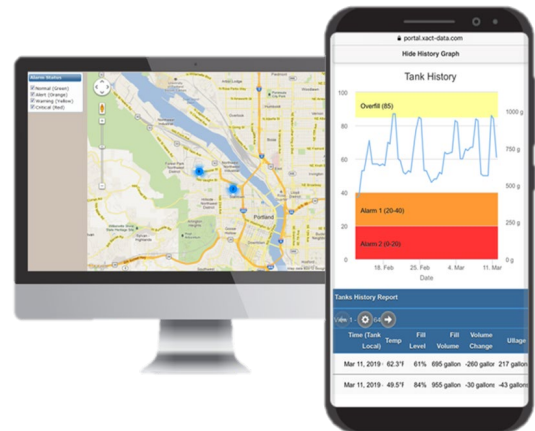

Externally Mounted, Install In Minutes

Xact ultrasonic systems mount externally on tanks, allowing for a quick, safe and easy setup. No need to retrofit or decommission tanks.

Dependable, Fail Safe Monitoring

Satellite transmission and ultrasonic accuracy ensure that users will get consistent and accurate fill levels. Avoid the worry of missing data from faulty gauges or failing cell networks.

Other Key Takeaways

- Durable in harsh temperatures ranging from -40°C to 60°C
- No dependence on remote-ready gauges or power sources
- 5-year battery operation at 2 readings per day
- Integrates into MIS delivery scheduling programs
- For tank sizes ranging from 6,000 to 90,000 gallons (22,712 to 340,686 liters)

Precise Measurements Within $\pm 1\%$

Xact ultrasonic systems use sound waves to detect fill levels at an accuracy within $\pm 1\%$. These precise measurements help propane marketers get the most out of their inventory and monitor key customer accounts.

Online Tank Data Transmitted via Satellite

Xact ultrasonic systems transmit data via the Globalstar® satellite network to our online Web App. Users can access their latest tank data from any internet connected device.





Precise measurements for inventory management

SMALL TANK SYSTEM SPECIFICATIONS

Products

XACT50060 – Small Tank Ultrasonic System

Dimensions (XACT50060)

7.56in L x 5.07in W x 2.67in H
(192mm L x 129mm W x 68mm H)

Battery

7.2 volt Lithium Thynol Chloride

Output power of Globalstar Satellite Radio

24dBm ±2 dB

Safety Rating

Class 1 Division 2 Group D



Class 1 Zone 2 Group IIA

Strap

Nylon – 15 feet (4.5 meters)

Dimensions (XACT50060)

4.01in L x 4.01in W x 1.34in H
(102mm L x 102mm W x 34mm H)

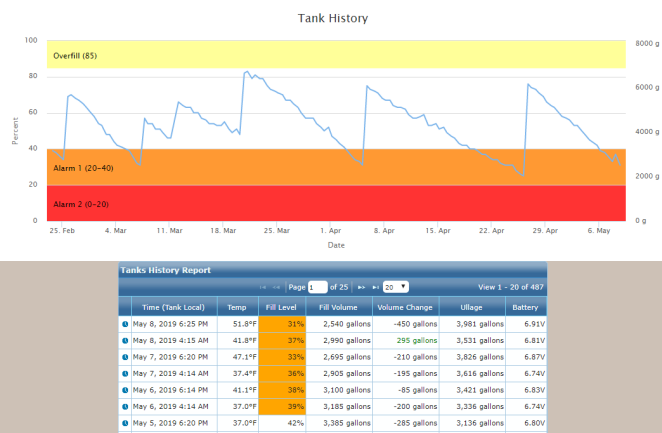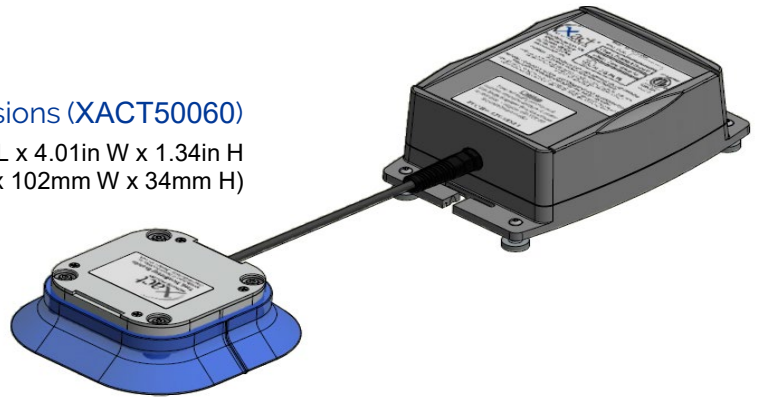

The liquid measurement data, along with the geometry of the tank, are used to calculate the precise fill level ($\pm 1\%$) of the liquid in the tank, which is displayed on the Xact website. The tank fill level can also be integrated into your back-office software, so that you can view all of your data in one place. Other benefits include email alerts of critical tank fill levels, GPS coordinates used for tank location with mapping capabilities and exportation of measurement data. Minimum tank fill level measurement is 10%.

SAFETY LABEL

For more information, visit xact-data.com



Schmitt Industries, Inc.
Corporate Offices
2765 NW Nicolai Street
Portland, Oregon 97210-1818 USA
Tel: +1 503.227.7908
Fax: +1 503.223.1258
www.schmitt-ind.com

Model: XACT-01/02 series
Manf. Date:

Class I, Division 2 Group D ETL CLASSIFIED
Class I, Zone 2 Group IIA c ETL US

Ex nA nC IIA T6 Gc Intertek
Tamb: -20°C to +55°C 4000718

WARNING – EXPLOSION HAZARD – BATTERY MUST ONLY BE CHANGED IN AN AREA KNOWN TO BE NON-HAZARDOUS.
AVERTISSEMENT – RISQUE D'EXPLOSION – AFIN D'EVITER TOUT RISQUE D'EXPLOSION, S'ASSURER QUE L'EMPLACEMENT EST DESIGNÉ NON DANGEREUX AVANT DE CHANGER LA BATTERIE

SISTEMA DE MONITOREO PARA TANQUES
Marca: XACT
7.2 V (con Baterias)

Gauge Reader Devices - Voc = 7.2VDC, Isc = 0.6A, La = 10.14µH, Ca = 701.26 µF
Use only replaceable battery pack XEC-722-003

NOM-ETL Intertek